

# ELECTRONIC SOLUTIONS FOR CONTROL & PROTECTION OF SINGLE PHASE PUMPS

IP65  
Enclosure

3 PIECES UNION  
Integrated

NON-RETURN VALVE  
built-in

WATER ACCUMULATOR  
built-in



TROPICALIZED  
electronic board

FREE POSITIONING  
vertical, horizontal  
or at any angle

'EXCESSIVELY FREQUENT STARTS' protection  
with auto reset

'DRY RUN' protection  
with auto reset

**DG  
FLOW**

**PRESFLO starts and stops the pump  
It substitutes traditional pressure switch/surge tank  
systems while offering important advantages**



# PRODUCT LINE, FEATURES & OPTIONALS



## PRESFLO

**SIMPLICITY**  
Fix start pressure



## PRESFLO VARIO

**VERSATILITY**  
Adjustable start pressure



## PRESFLO MULTI

**COMFORT**  
- Adjustable start pressure  
- 3 litres tank  
- Overcurrent protection

### DIFFERENCES between models :

**Water accumulator type**

#### "SPRING-MEMBRANE" water tank

- "No ordinary maintenance required"
- "Engineered for long-life"




#### "SPRING-MEMBRANE" water tank

- "No ordinary maintenance required"
- "Engineered for long-life"
- Same water volume at different start pressure



#### "DIAPHRAGM" water tank

The tank is pre-loaded at 1.5 bar and has a capacity of 3 litres. It guarantees a comfortable accumulation volume, and it reduces the frequency of pump starts in the presence of leakages.

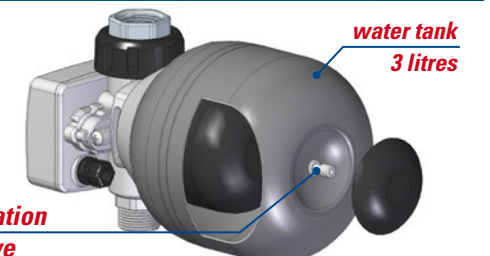

**Start Pressure (cut-in pressure)**

#### FIX "START PRESSURE"

3 models, each one with a factory preset value

0,8 bar    1,5 bar    2,2 bar



#### ADJUSTABLE "START PRESSURE"

Easily and intuitively by means of the rotary control knob.


Range: 0,8 bars ÷ 2,4 bars




#### ADJUSTABLE "START PRESSURE"

Easily and intuitively by turning a screw. You may use the supplied screw driver (pic.A)

Range: 1bars ÷ 5 bars

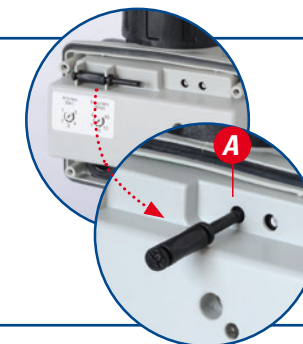

Pressure value is detected by an electronic pressure sensor.

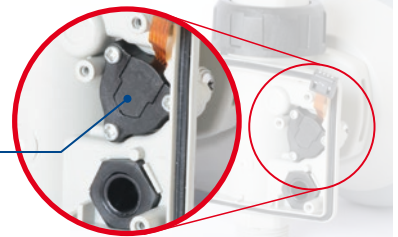

**Max. Pump Power**

**PRESFLO 12:** 1,5 Hp max pump power

**PRESFLO 16:** 2,0 Hp max pump power

**PRESFLO VARIO:** 2,0 Hp max pump power

**PRESFLO MULTI:** 2,0 Hp max pump power

Equipped with overload protection. The protection setting is easy by simply and intuitively turning a screw (pic.B)




### KEY FEATURES COMMON ON ALL MODELS :

**3 PIECES UNION integrated**



Avoiding the need of expensive 3 pieces unions.

**NON-RETURN VALVE built-in and inspectionable**

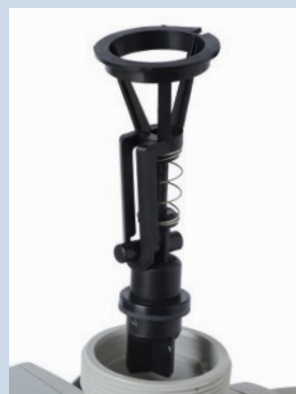

Avoid the need to install one

**PRESSURE GAUGE easy-to-add**



OPTIONAL: it can be added anytime.

**FREE POSITIONING vertical, horizontal or at any angle**



Thanks to the spring loaded valve.

**PROTECTIVE COVER FOR ELECTRIC PARTS**



To prevent damages during installation.

**IP65 enclosure:** able to protect against water jets

**DRY RUN protection** with automatic reset

**EXCESSIVELY FREQUENT STARTS protection.** Prevent pump overheating and damages. (PATENTED)

**LOW HEAD LOSSES.** the most performant on market today 0.3 bars at 100 lt/min

**TROPICALIZED ELECTRONIC** it saves and prolongs life of the electronic components.




## PUMP MATCHING - ESSENTIAL CHECK

Carefully check the electric and hydraulic features and make sure they comply with those of the pump and the system, but in particular:


- Presflo 0.8 bars start pressure requires :**
  - pump head of at least 1.8 bars &
  - the water column between the device and the highest user point must not exceed 8 mtrs - less 2 mtrs tolerance = 6 mtrs (see picture : H)  
(otherwise raise control until conditions are fulfilled)
- Presflo 1.5 bars start pressure requires :**
  - pump head of at least 2.5 bars &
  - the water column between the device and the highest user point must not exceed 15 mtrs - less 2 mtrs tolerance = 13 mtrs (see picture : H)  
(otherwise raise control until conditions are fulfilled)
- Presflo 2.2 bars start pressure requires :**
  - pump head of at least 3.2 bars &
  - the water column between the device and the highest user point must not exceed 22 mtrs - less 2 mtrs tolerance = 20 mtrs (see picture : H)  
(otherwise raise control until conditions are fulfilled)

$H =$ 


- max 8 m ● 0,8 bar
- max 15 m ● 1,5 bar
- max 22 m ● 2,2 bar

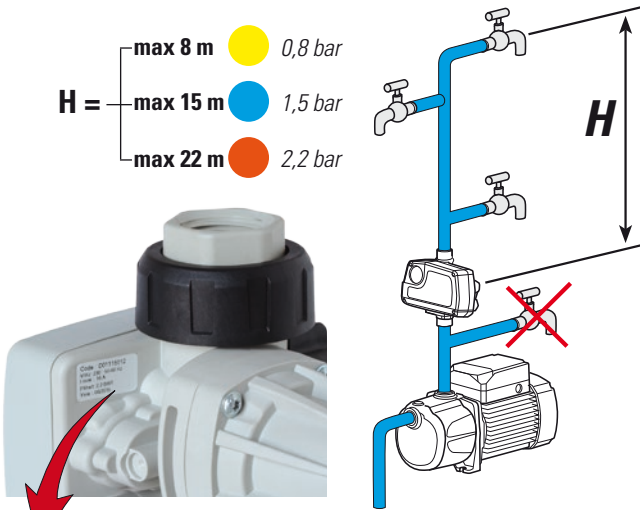

## HEAD LOSSES

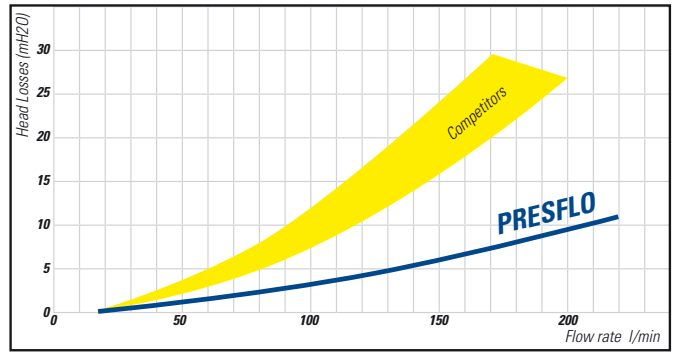

## DIMENSIONS

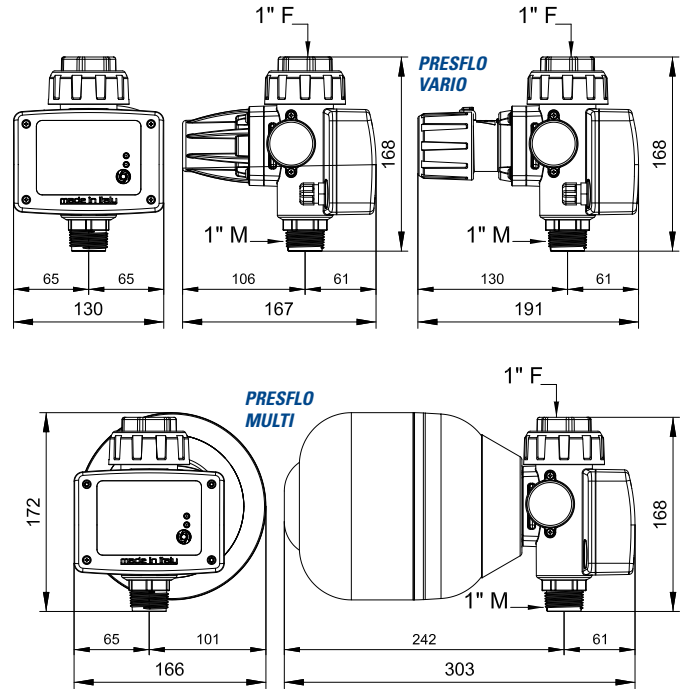

Models	Max. pump power		Start pressure bar	Max. current A	Water storage	Protections			Voltage V	Frequency Hz	Connections	cut-off flow rate	IP protection
	Kw	Hp				dry run	frequent starts	over current					
<b>PRESFLO</b>													
PF 1208	1,1	1,5	0,8	12	spring membrane	•	•		230	50/60	1" BSP	2 l/min	IP 65
PF 1215	1,1	1,5	1,5	12		•	•						
PF 1222	1,1	1,5	2,2	12		•	•						
PF 1615	1,5	2,0	1,5	16		•	•						
PF 1622	1,5	2,0	2,2	16		•	•						
<b>PRESFLO VARIO</b>													
PFV 12	1,1	1,5	0,8 - 2,4	12	spring membrane	•	•		230	50/60	1" BSP	2 l/min	IP 65
PFV 16	1,5	2,0	0,8 - 2,4	16		•	•						
<b>PRESFLO MULTI</b>													
PM 16	1,5	2,0	1,0 - 5,0	16	3 ltrs tank	•	•	•	230	50/60	1" BSP	2 l/min	IP 65

\*110 Volts and NPT connection available on request



**DGFLOW srl**  
 Via Emilia, 5 - 46030 Bigarello (Mantova) Italy  
 tel. +39 0376 340922 - fax. +39 0376 249525  
 info@dgflow.it - www.dgflow.it